


Adhesive system for facade

The system is ventilated, and is one of the most highly efficient facade systems. The opportunity to use smaller dimensioned schist and lower thicknesses also provides lower transport costs and simplified hand-lining at the construction site. The fixing method is invisible and installation is fast, and the system offers the option to use the stones in both horizontal and vertical orientation.

TECHNICAL INFORMATION

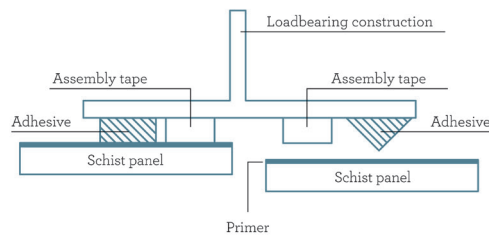

Schist panels with a low thickness, 10-20 mm, can be used for direct adhered facades. The schist panels are supplied in fixed thickness and with sawn edges.

Erection

Supporting concrete structure, external insulation, air barrier and schist. The aluminium profiles are erected on brackets in order to ensure space for the external insulation.

Fixing

The schist panels are affixed using a temporary fixing tape until the construction structural adhesive sets. Adhered to vertical aluminium profiles. The schist panels and profiles are cleaned using a special cleaning fluid prior to adhesion.

REFERENCE PROJECT

Nordea Bank Copenhagen

Location:
Ørestad in
Copenhagen,
Denmark

**Year of
construction:**
2013 - 2017

Architect:
Henning Larsen
Architects

Quantity:
3 000 m² facade
panels (as well as
5 000 m² flooring,
800 m² paving
and 100 tons of
bricks).


Client:
Nordea Properties



OFFERDAL



Natural

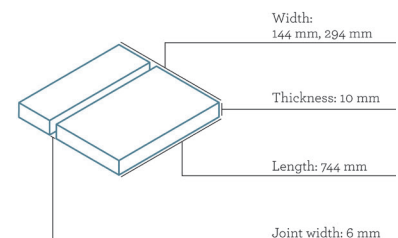

TYPES OF SCHIST, SURFACES, EDGES AND FORMATS



Edge:
Sawn

Format:
Width 10–60 cm x length 10–200 cm.
The schist panels may be assembled in patterns with varying heights.

