



ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Minera Skifer AS
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-1585-609-EN
Registration number:	NEPD-1585-609-EN
ECO Platform reference number:	-
Issue date:	06.07.2018
Valid to:	06.07.2023

Natural stone phyllite schist, natural cleft/brushed/honed surface,
sawn/cut edge, Otta

Minera Skifer AS

www.epd-norge.no



General information

Product:

Natural stone phyllite schist, natural cleft/brushed/honed surface, sawn/cut edge, Otta

Program operator:

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo
Phone: +47 977 22 020
e-mail: post@epd-norge.no

Declaration number:

NEPD-1585-609-EN

ECO Platform reference number:

-

Owner of the declaration:

Minera Skifer AS
Contact person: Terje Holstad
Phone: +47 90 85 73 73
e-mail: terje@mineraskifer.no

Manufacturer:

Minera Skifer AS, Sliperigata
2670 Otta
Norway

Place of production:

Pillarguripiggen, Otta, Norway

Management system:

No

This declaration is based on Product Category Rules:

NPCR Part A: Construction products and services, v 1.0.
IBU PCR Part B: Requirements on the EPD for Dimension stone for roof, wall and floor applications, v1.6 (PCR template), v 1.0 (PCR specific).

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data or evidence.

Organisation no:

NO 980 253 708 MVA

Issue date:

06.07.2018

Issue date:

06.07.2023

Year of study:

Consumption data: 2017. Study performed spring of 2018.

Declared unit:

Production of 1 ton natural stone phyllite schist, natural cleft/brushed/honed surface, sawn/cut edge, Otta

Comparability:

EPD of construction products may not be comparable if they do not comply with EN 15804 and are seen in a building context.


Declared unit with option:

Functional unit:

Production of 1 ton natural stone phyllite schist, natural cleft/brushed/honed surface, sawn/cut edge, from Otta, manufactured, delivered, installed, used for 60 years and disposed after end of service time.

The EPD has been worked out by:

Oddbjørn Dahlstrøm
Asplan Viak AS, Norway

Verification:

The CEN Norm EN 15804 serves as the core PCR.
Independent verification of the declaration and data,
according to ISO14025:2010

☐ internal


☒ external

Third party verifier:



Lars G. F. Tellnes, Østfoldforskning
(Independent verifier approved by EPD Norway)

Approved



Håkon Hauan
Managing Director of EPD-Norway

Product

Product description:

Schist from Otta is a dark phyllite schist. The characteristic of schist from Otta are the roses of black amphibian crystals and the small crystals of garnet. It is very suitable as a ceiling and facade, as well as an interior tile floor and wall in all types of rooms.

Product specification:

Pavement block, massive slabs, wall cladding, flooring tiles, brick, slabs and steps.

Surface: Natural cleft/brushed/honed surface

Edge: Sawn/cut edge

Thickness: Standard thickness 25 mm. Standard thickness after thickness adjustment (calibration) 20 mm

For Declaration of Performance (DoP) and complementary information, see www.mineraskifer.no

Materials	%
Natural stone, 1000 kg	100 %
Quartz	25 - 35 %
Glimmer	40 - 45 %
Chlorite	10 - 15 %
Amphibole	0 - 5 %
Grenade	1 - 3 %
Carbonate	1 - 3 %
Pyrrhotite	1 - 7 %
Packaging: plastic film	0,134 kg
Packaging: plastic angle	0,006 kg

Technical data:

Standard thickness, natural:	25 mm	Even thickness	20 mm
1 ton schist equals to:	14,2 m ²		17,8 m ²

Values are mean value		Schist from Otta	
Petrography:	EN 12407	Phyllite schist	
Density:	EN 1936	2,81	kg/m ³
Water absorption	EN 13755	0,2	weight%
Frost resistance		Yes	
Flexural strength	EN 12372	30,7	MPa
Compressive strength	EN 1926	230,4	MPa
Slip resistance, brushed	EN 14231	61	SRV dry
		22	SRV wet
Slip resistance, honed C600	EN 14231	55	SRV dry
		18	SRV wet
Abrasion resistance	EN 14157 (A)	15,0	mm

Market:

Main market is in Norway and the Nordic countries. Products are also exported to Europe and other continents.

Reference service life, product:

Reference service life is same as for buildings and normally set to 60 years. Natural stones of schist has almost unlimited life time.

LCA: Calculation rules


Functional unit:

Production of 1 ton natural stone phyllite schist, natural cleft/brushed/honed surface, sawn/cut edge, from Otta, manufactured, delivered, installed, used for 60 years and disposed after end of service time.

System boundary:

Flow sheet for manufacturing of natural stone of schist is shown below.

Scenario A4, B1-B7, C2-C4 are similar for all products.

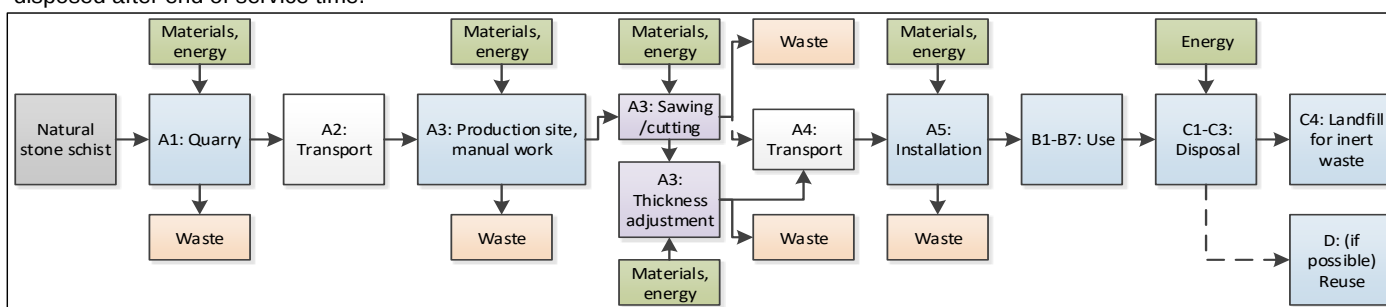

Data quality:

Data for (A1-A3) is based on specific consumption data for Minera Skifer Otta 2017. Emissions from production and detonation of explosives are derived from safety data sheets for the relevant explosive types. Generic data is from Ecoinvent v3.2, Allocation, Recycled Content (November 2015) and SimaPro v 8.2.3.0. Characterization factors from EN15804: 2012 + A1: 2013. No data is older than 5 years.

Cut-off criteria:

All major raw materials and all the essential energy is included. The production process for raw materials and energy flows that are included with very small amounts (<1%) are not included. This cut-off rule does not apply for hazardous materials or substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste

production in-house (A3) is allocated equally among all products through mass allocation. Economic allocation is used upstream (A1 and A2) because machine blocks from the quarry are not subject for further processing. Price for machine blocks are significant lower compared with processed schist products (>25% difference).

Difference in material consumption, energy and waste production in the production of different products (floor tiles, slabs, roofing etc.) are considered to be marginal, as production processes are nearly the same.

Schist products with sawn and cut edges has approximately equal energy consumption, as cutting of edges is a separate operation that is performed on a product that has already been sawn a little over measure. The results are divided into schist products with natural cleft surface and schist products with even thickness (after thickness adjustment), as schist products with even thickness undergo an additional process after manual work and sawing/cutting.

LCA: Scenarios and additional technical information

The following information describes the scenarios in the different modules of the EPD.

Reference service life

Reference service life is same as for buildings and normally set to 60 years. Natural stones of schists has almost unlimited life time and is therefore normally not being replaced during service life.

Schist fixed with screws or nails on a façade or on a roof can be reused. Bricks installed dry (without mortar) can be changed, rebuilt and reused. Schist installed with mortar can be reused after removal of mortar. Schist installed with adhesives on floors and walls can to a minor extent be reused and must be deposited on landfill intended for inert disposal.

Transport from production place to user (A4)

All production is normally delivered directly from Otta to building site. As scenario a distance of 300 km delivered by lorry (>32 t) is calculated. This is corresponding to the distance from Otta - Oslo.

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	
Lorry, 50 ton	53 %	Lorry, >32t, EURO5	300	0,018 l/tkm	5,3 l/t

Installation in the building (A5)

Products of schists can be installed in various ways, from no installation on base of gravel (paving), installation with cement based adhesives (floor tiles, crazy paving and wall cladding), installation with mortar (chimney caps, and bricks) and installation as roofing with nails or screws).

In this scenario it is calculated with installation with cement based adhesives (similar as for installation of ceramic tiles).

It is assumed 10% spillage at installation.

Waste treatment of the packaging is included in the A5.

	Unit	20 mm	25 mm
Auxiliary, mortar	kg	89	71,2
Water consumption	litre	17,8	14,2
Electricity consumption	kWh	0,56	0,44
Other energy carriers	MJ	0	0
Material loss	kg	100	100
Output materials from waste treatment	kg	0,14	0,14
Dust in the air	kg	0	0

Assume 5 kg cement mortar + 1,0 litre of water pr. m² installed schist. 20 kg of mortar mixed with an electric mixer with effect 1,5 kW for 5 min.

Use (B1 – B7)

Schists are in many cases characterized as maintenance free. Schist as roofing, crazy paving in the garden and paving on sidewalks are not being maintained. Schists installed inside are also often considered as maintenance free. Schists installed in a kitchen and a bathroom are normally impregnated with a chemical designed for this purpose. Since there are many manufacturers, products and types for surface treatment, and also the fact that some schists are not treated, impregnation of schists is not included in this scenario. This must be added where such products are considered used. All modules in the use stage (B1 – B7) are analysed, and apart from eventual application of impregnation or other types of surface treatment the schist requires no maintenance, repair or replacement during use stage. Therefore there is no effect on the environment during use stage.

End of Life (C1, C3, C4)

Installed schists are demolished in different ways, depending of type of installation. In this scenario it is assumed installation with cement based adhesive and therefore it must be demolished by chisel. Assume electric chisel hammer with effect 2 kW, using 1 min. per 1 m² surface. The removed schist is transported 50 km to a landfill for inert disposal or used as landfill for different purpose.

	Unit	20 mm	25 mm
Electricity consumption	kWh	0,59	0,47
Hazardous waste disposed	kg	0	0
Collected as mixed construction waste	kg	0	0
Reuse	kg	0	0
Recycling	kg	0	0
Energy recovery	kg	0	0
To landfill	kg	1000	1000

Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	
Lorry	Average in Europe	Lorry >16t, average	50	0,045 l/tkm	2,5 l/t

Additional technical information

Alternation of results from per ton to per m² can be done by multiplying results with thickness in meters and density 2,81 ton/m³. Example:

Even thickness, 20 mm: $425 \text{ kg CO}_2 \text{ e/ton} \times 0,020 \text{ m} \times 2,81 \text{ ton/m}^3 = 17,9 \text{ kg CO}_2 \text{ e/m}^2 \text{ schist.}$
 Natural surface, 25 mm: $161 \text{ kg CO}_2 \text{ e/ton} \times 0,025 \text{ m} \times 2,81 \text{ ton/m}^3 = 13,6 \text{ kg CO}_2 \text{ e/m}^2 \text{ schist.}$

LCA: Results

A1-A3, A5 and C1 is calculated separately for schist products with even thickness (after thickness adjustment). A4, B1-B7, C2-C4 is equal for all schist products from Otta.

Nat.: Schist products with natural cleft/brushed/honed surface, standard 25 mm thickness, sawn/cut edge

Even: Schist products with even thickness (after thickness adjustment), standard 15 mm thickness, sawn/cut edge

System boundaries (X=included, MND= module not declared, MNR=module not relevant)

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	MID

Environmental impact

Parameter	Unit	A1-A3 Nat.	A1-A3 Even	A4	A5 Nat.	A5 Even	B1-B7	C1 Nat.	C1 Even	C2	C3	C4
GWP	kg CO ₂ -ekv	161	425	22,7	34,0	64,0	0	2E-02	2E-02	8,39	0	2,68
ODP	kg CFC11-ekv	2,6E-05	6,7E-05	4,6E-06	4,0E-06	8,3E-06	0	2E-09	2E-09	1,5E-06	0	4,6E-07
POCP	kg C ₂ H ₄ -ekv	3,6E-02	0,10	4,4E-03	6,4E-03	1,3E-02	0	4E-06	5E-06	1,4E-03	0	8,8E-04
AP	kg SO ₂ -ekv	1,10	2,88	8,9E-02	0,16	0,35	0	8E-05	9E-05	2,8E-02	0	2,0E-02
EP	kg PO ₄ ³⁻ -ekv	0,30	0,80	2,0E-02	4,3E-02	0,10	0	4E-05	5E-05	6,2E-03	0	4,6E-03
ADPM	kg Sb-ekv	4,6E-04	1,4E-03	6,2E-05	6,4E-05	1,6E-04	0	2E-07	3E-07	2,5E-05	0	8,2E-07
ADPE	MJ	2 210	5 811	373	361	743	0	0,19	0,23	127	0	38,3

GWP Global warming potential; **ODP** Depletion potential of the stratospheric ozone layer; **POCP** Formation potential of tropospheric photochemical oxidants; **AP** Acidification potential of land and water; **EP** Eutrophication potential; **ADPM** Abiotic depletion potential for non fossil resources; **ADPE** Abiotic depletion potential for fossil resources

Resource use

Parameter	Unit	A1-A3 Nat.	A1-A3 Even	A4	A5 Nat.	A5 Even	B1-B7	C1 Nat.	C1 Even	C2	C3	C4
RPEE	MJ	2 847	8 363	6,98	302	857	0	1,95	2,44	1,36	0	0,24
RPEM	MJ	8,8	22,2	0	0,88	2,22	0	0	0	0	0	0
TPE	MJ	2 856	8 386	6,98	302	859	0	1,95	2,44	1,36	0	0,24
NRPE	MJ	2 281	5 995	391	387	784	0	0,23	0,28	129	0	38,6
NRPM	MJ	21,6	54,9	0	2,16	5,49	0	0	0	0	0	0
TRPE	MJ	2 303	6 050	391	389	789	0	0,23	0,28	129	0	38,6
SM	kg	0,71	3,74	0	0,07	0,37	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0	0	0
W	m ³	21,8	64,1	0,11	2,36	6,63	0	1,5E-02	1,8E-02	2,7E-02	0	6,4E-03

RPEE Renewable primary energy resources used as energy carrier; **RPEM** Renewable primary energy resources used as raw materials; **TPE** Total use of renewable primary energy resources; **NRPE** Non renewable primary energy resources used as energy carrier; **NRPM** Non renewable primary energy resources used as materials; **TRPE** Total use of non renewable primary energy resources; **SM** Use of secondary materials; **RSF** Use of renewable secondary fuels; **NRSF** Use of non renewable secondary fuels; **W** Use of net fresh water

End of life - Waste

Parameter	Unit	A1-A3 Nat.	A1-A3 Even	A4	A5 Nat.	A5 Even	B1-B7	C1 Nat.	C1 Even	C2	C3	C4
HW	kg	1,6E-03	4,7E-03	2,4E-04	3,2E-04	6,6E-04	0	2,9E-07	3,6E-07	7,8E-05	0	1,6E-05
NHW	kg	2 442	7 754	45,7	351	882	0	1,4E-02	1,8E-02	5,95	0	1 000
RW	kg	1,5E-02	3,9E-02	2,7E-03	2,6E-03	5,2E-03	0	1,4E-06	1,7E-06	8,7E-04	0	2,6E-04

HW Hazardous waste disposed; **NHW** Non hazardous waste disposed; **RW** Radioactive waste disposed

End of life - Output flow

Parameter	Unit	A1-A3 Nat.	A1-A3 Even	A4	A5 Nat.	A5 Even	B1-B7	C1 Nat.	C1 Even	C2	C3	C4
CR	kg	0	0	0	0	0	0	0	0	0	0	0
MR	kg	1,70	8,91	0	0,17	0,89	0	0	0	0	0	0
MER	kg	0	0	0	0	0	0	0	0	0	0	0
EEE	MJ	1,75	4,44	0	0,17	0,44	0	0	0	0	0	0
ETE	MJ	17,1	43,3	0	1,71	4,33	0	0	0	0	0	0

CR Components for reuse; **MR** Materials for recycling; **MER** Materials for energy recovery; **EEE** Exported electric energy; **ETE** Exported thermal energy

INA = Indicator not assessed

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009

Additional Norwegian requirements

Greenhouse gas emission from the use of electricity in the manufacturing phase

National production mix with import, on low voltage (included production of transmission lines, in addition to direct emissions and losses in grid) is applied for electricity in the manufacturing process.

Data source	Amount	Unit
Ecoinvent v3.2 (November 2015)	0,0358	kg CO ₂ -ekv/kWh

Dangerous substances

- ☒ The product contains no substances given by the REACH Candidate list or the Norwegian priority list
- ☐ The product contains substances given by the REACH Candidate list or the Norwegian priority list that are less than 0,1 % by weight.
- ☐ The product contain dangerous substances, more then 0,1% by weight, given by the REACH Candidate List or the Norwegian Priority list, see table.
- ☐ The product contains no substances given by the REACH Candidate list or the Norwegian priority list. The product is classified as hazardous waste (Avfallsforskriften, Annex III), see table.

Name	CAS no.	Amount

Transport

Transport from production site to a construction site according to scenario A4: 300 km

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	
Lorry, 50 ton	53 %	Lorry, >32t, EURO5	300	0,018 l/tkm	5,3 l/t

Indoor environment

Concentration of radium in a schistose stone is in the range of 10 - 120 Bq/kg. There is nothing in the mineral content in the schist from Oppdal that should imply a high potential of radon.

Use of schist indoor (flooring, wall cladding, fire places etc.) should normally not imply increased radon concentrations exceeding the background level. This is related to the volume of schist compared to other building materials (gravel, sand) used in the building ground. It should also imply that the contribution of radon from the schist normally will have a small or no impact on the level of radon in a house. Geological survey of Norway, NGU 06.12.04.

Carbon footprint

Carbon footprint has not been worked out for the product.

Bibliography

Dahlstrøm, Oddbjørn	<i>LCA-report for Minera Skifer Offerdal og Otta. LCA-report nr 536276-02. from Asplan Viak AS, Sandvika, Norway</i>
Ecoinvent v3.2	Swiss Centre of Life Cycle Inventories. www.ecoinvent.ch
Institut Bauen und Umwelt e.V. (IBU)	<i>PCR Guidance-Texts for Building-Related Products and Services. From the range of Environmental Product Declarations of Institut Bauen und Umwelt e.V. (IBU).</i>
NPCR Part A	<i>Construction products and services, v 1.0.</i>
IBU PCR Part B	<i>Requirements on the EPD for Dimension stone for roof, wall and floor applications, v1.6 (PCR template), v 1.0 (PCR specific)</i>
Geological survey of Norway, NGU	<i>Report-radioactivity in schist from Otta, Oppdal and Alta. 06.12.04</i>
ISO 21930:2007	<i>Sustainability in building construction - Environmental declaration of building products</i>
EN 1926:2006	<i>Natural stone test methods. Determination of uniaxial compressive strength</i>
EN 1936:2006	<i>Natural stone test methods. Determination of real density and apparent density, and of total and open porosity</i>
EN 12407:2007	<i>Natural stone test methods. Petrographic examination</i>
EN 12372:2006	<i>Natural stone test methods. Determination of flexural strength under concentrated load</i>
EN 13755:2008	<i>Natural stone test methods. Determination of water absorption at atmospheric pressure</i>
EN 14157:2004	<i>Natural stone test methods - Determination of the abrasion resistance</i>
EN 14231:2003	<i>Natural stone test methods. Determination of the slip resistance by means of the pendulum tester</i>
EN ISO 14025:2010	<i>Environmental labels and declarations - Type III environmental declarations - Principles and procedures</i>
EN ISO 14044:2006	<i>Environmental management - Life cycle assessment - Requirements and guidelines</i>
EN 15804:2012+A1:2013	<i>Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products</i>

 epd-norge.no The Norwegian EPD Foundation	Program operator The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Tel: +47 977 22 020 e-mail: post@epd-norge.no web: www.epd-norge.no
	 Owner of the declaration Minera Skifer AS 2670 Otta Norway	Tel: +47 90 85 73 73 e-mail: terje@mineraskifer.no web: www.mineraskifer.no
	Author of the Life Cycle Assessment Asplan Viak AS Oddbjørn Dahlstrøm Kjørboveien 20, 1337 Sandvika, Norway	Tel: +47 417 99 417 e-mail: oddbjorn.dahlstrom@asplanviak.no web: www.asplanviak.no